



	Fresh Water	Pool Water	Sea Water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug and Spray
Profilux 370 LED 12 V/01	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Profilux 370 LED 24 V/01	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LunAqua 10 LED /01	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

PROFILUX 370 LED 01 / LUNAQUA 10 LED 01

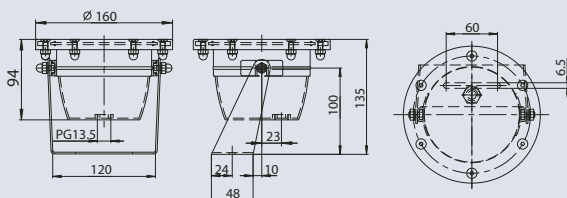
Our well-proven spotlights are now equipped with a warmwhite, energy efficient LED platine generating an impressive illumination. Both are equipped with performance- adjustment capability should the surrounding temperature increase to avoid damaging. Applicable at voltages are 12 V and also 24 V.

Product characteristics Profilux 370 LED

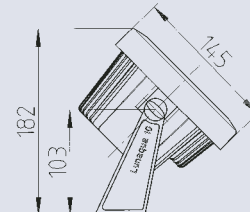
- 12 V AC/24 V DC compatible
- Stainless steel housing, warmwhite and circular LED platine
- Up to 8 spotlights of the 12V version can be connected to transformer UST 150 by using the power boxes
- Temperature protection
- Reverse polarity protection
- Incl. lamp (not dimmable)

Product characteristics LunAqua 10 LED

- LED Spotlight warmwhite
- Compatible with connection cable and transformer of the LunAqua 10 Halogen system
- 12 V AC/24 V DC compatible
- Up to 8 spotlights of the 12V version can be connected to transformer UST 150 by using the power boxes
- Temperature protection
- Reverse polarity protection
- Incl. lamp (not dimmable)



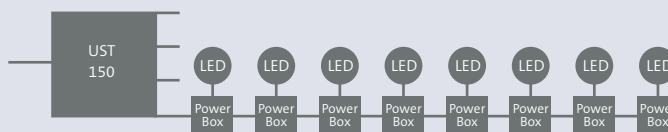
Profilux 370 LED 12V/01 and Profilux 370 LED 24V/01



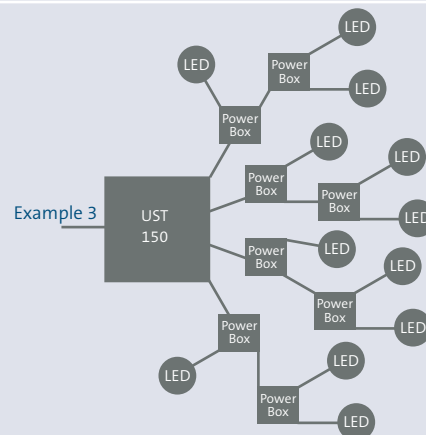
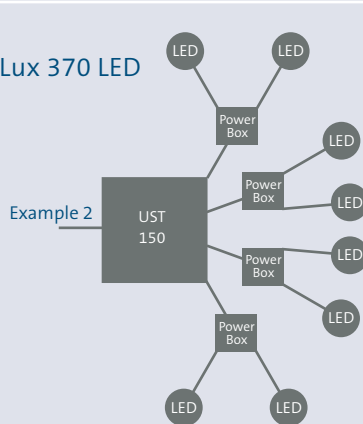
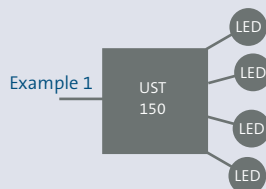
LunAqua 10 LED/01

Series circuit:

- max. 8 x ProfiLux 370 LED in series
- for a series circuit the PowerBox plus cable is additionally required per spotlight!

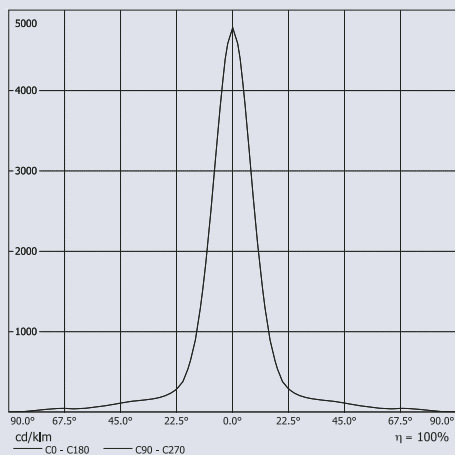

Star circuit:

- max. 12 x LunAqua 10 LED / ProfiLux 370 LED


Accessories (must be ordered separately)

Connecting cable 24V DC/01 (see page 160)	Order no.
Cable 24V DC /1.0 m/01	12762
Cable 24V DC /3.0 m/01	12552
Cable 24V DC /7.5 m/01	12553
Cable 24V DC /15.0 m/01	11720
Power Box 24V DC/01 (see page 160)	50493
Underwater power supply 250 / 24 V / 01 (see page 170)	50733

Connecting cable 12V AC/01 (see page 160)	Order no.
Cable 12V AC /1.0 m/01	12768
Cable 12V AC /3.0 m/01	12374
Cable 12V AC /7.5 m/01	12375
Cable 12V AC /15.0 m/01	11740
Power Box 12V AC/01 (see page 160)	50492
Underwater transformer UST 150/01 (see page 190)	50401
Underwater transformer UST 150/A/01 (see page 190)	50517



Abstand [m]	Kegeldurchmesser [m]	Beleuchtungsstärke [lx]
0.5	0.16	E(0°) 6981 E(C0) 3372
1.0	0.32	E(0°) 1745 E(C0) 843
1.5	0.48	E(0°) 776 E(C0) 375
2.0	0.64	E(0°) 436 E(C0) 211
2.5	0.80	E(0°) 279 E(C0) 135
3.0	0.96	E(0°) 194 E(C0) 94

Abstand [m] Kegeldurchmesser [m] Beleuchtungsstärke [lx]
 — C0 - C180 (Halbstrahlwinkel: 18.2°)

	ProfiLux 370 LED 12V/01	ProfiLux 370 LED 24V/01	LunAqua 10 LED/01
Dimensions (Ø x H)	[mm] 160 x 135	160 x 135	145 x 100
Voltage	[V/Hz] 12 AC / 50-60	24 DC	12 AC / 24 DC / 50
Power consumption max.	[W] 10	10	10
Light intensity; Luminous flux	[cd/lm] 1800/370	1800/370	1800/370
Beam angle	[°] 20	20	20
Protection class	IP 68	IP 68	IP 68
Dimmable	no	no	no
Cable length	[m] 1.0 (with box)	1.0 (with box)	—
Material	Stainless steel 1.4301 (AISI 304)	Stainless steel 1.4301 (AISI 304)	Plastic
Weight	[kg] 2.5	2.5	1.6
Order no.	50367	50474	50366

* bulbs excluded from the guarantee

Please consider the informations given in the manual if you wish to connect existing and new products!