

OASE GmbH
 Tecklenburger Straße 161
 D - 48477 Hörstel
 Phone: +49(0)54 54 – 800
 Fax: +49(0)54 54 – 80 322
 info@oase-livingwater.com
 www.oase-livingwater.com

PondJet Eco

57704




Fresh water	Pool water	Sea water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug & Spray




Product characteristics at a glance

- Ready-to-connect complete aggregate, consisting of pump, float element and PondJet-nozzle with 1"-thread
- Clearly structured fountain height and spray diameter of 3 metres
- Minimum water depth in clear water is 1 m, for a muddy pond floor the minimum depth is 1.5 m
- Lighting set and additional nozzle patterns are available as accessories
- Materials: Float - HDPE , Pumps - Rynite/PET – st. steel 1.4301, ABS, Rubber cable H07RNF, Lights: Rynite/ABS, st. steel 1.4301, Rubber cable H07RNF


Pump performance curve

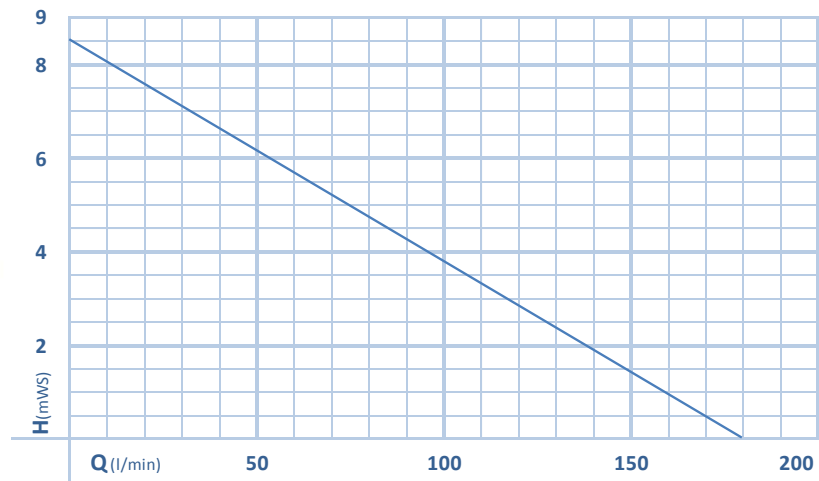

Halogen-Illumination Set PondJet

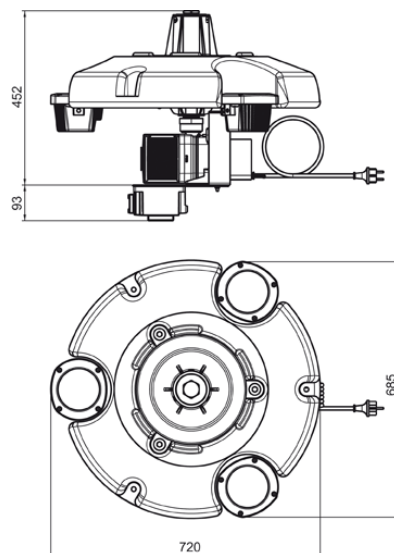

LED-floating fountain illumination white

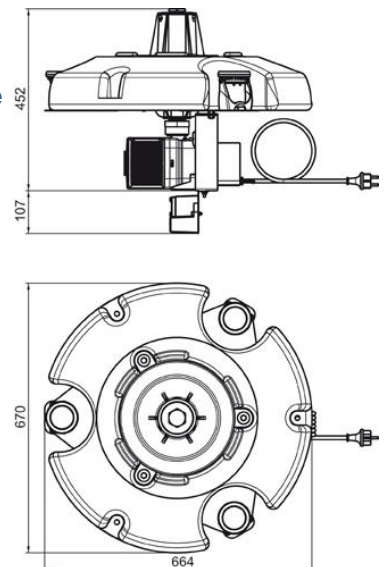

OASE GmbH
 Tecklenburger Straße 161
 D - 48477 Hörstel
 Phone: +49(0)54 54 – 800
 Fax: +49(0)54 54 – 80 322
 info@oase-livingwater.com
 www.oase-livingwater.com

PondJet Eco

57704



Connection possibility for the underwater transformer of the lighting set available as an accessory.



1"-thread with nozzle
 Here, as an example with a mounted Schaumsprudler 35-10 E.



PondJet-nozzle with 1"-thread, cover plate and plug. The 1"-thread allows 25 mm / 1" fountain attachments to be attached on the nozzle of the PondJet.



Accessories: Illumination set and fountain attachments

The optional LunAqua 10 spotlight set wonderfully illuminates water patterns. Additional fountain attachments are available.



The **dynamic function** can be activated by a switch. Thus attractive water patterns with different heights are produced. This function enables an average reduction in power consumption of 105 W.

Accessories (must be ordered separately)	Order no.
Schaumsprudler 35-10 E	50986
Vulcan 43-3 Silver	50766
Illumination Set PondJet	57083
LED-floating fountain illumination white	42637

PondJet Eco		
Dimensions (Ø x H)	[mm]	670 x 540
Operating voltage	[V/Hz]	220-240 / 50 / 60
Power consumption	[W]	190
Flow rate max.	[l/min]	180
Flow rate max.	[l/h]	10800
Head height max.	[m]	8.5
Pressure-side connection	[inch]	1
Spray height	[m]	3.0
Filter surface area	[cm²]	420
Cable length	[m]	20.0
Weight	[kg]	15.2
Order no.		57704