



	Fresh Water	Pool Water	Sea Water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug and Spray
Extension cable hybrid													
Hybrid Connection box													

EXTENSION CABLE HYBRID 3.0M/01 AND 7.5M/01 HYBRID CONNECTION BOX

OASE Extension cable hybrid are designed for underwater applications as well.

The Extension cable hybrid (data+ power supply) are suitable for:

- ProfiLux LED 110/DMX/02 (56267)
- ProfiPlane LED 110/DMX/02 (56298)
- ProfiLux LED 320/DMX/02 (50717)
- ProfiRing LED 320/DMX/02 (50718)
- ProfiPlane LED 320/DMX/02 (50719)
- ProfiLux LED Spot 1500/DMX/02 (56388)
- ProfiLux LED Flood 1500/DMX/02 (56391)

Only one extension cable can be used per LED unit.

Product characteristics at a glance

- Extension cable hybrid 3.0 m or 7.5 m long with connector
- Female / male connections
- IP 68 protection
- 4-core shielded

Scope of delivery

- 4 x screw M5
- 1 x cable
- 1 x connector



Extension cable hybrid/3.0m/01



Extension cable hybrid/7.5m/01





The Hybrid connection box is a junction box from one hybrid connection to max. 4 slots. The Hybrid connection box has a waterproof plug connection (Plug and Spray) for OASE hybrid cables.

Product characteristics at a glance


- Hybrid connection box for max. 4 lights (ProfiLux LED 110/DMX/02 or ProfiPlane LED 110/DMX/02)
- All 4 outlets just simultaneously controllable
- RDM status information from outlet 1
- Female / male connection
- Protection class IP 68
- Only one connection box per Line

Accessories (must be ordered separately)

Power splice	57648
--------------	-------

Extension cable hybrid	3.0 m/01	7.5 m/01
<p>Male</p> <p>Female</p>		
Extension cable hybrid	3.0 m/01	7.5 m/01
Length [m]	3.0	7.5
Diameter (Ø) [mm²]	4 x 0.34	2 x 1; 2 x 0.24
Weight [kg]	0.38	0.38
Order no.	50728	56403

Hybrid Connection box

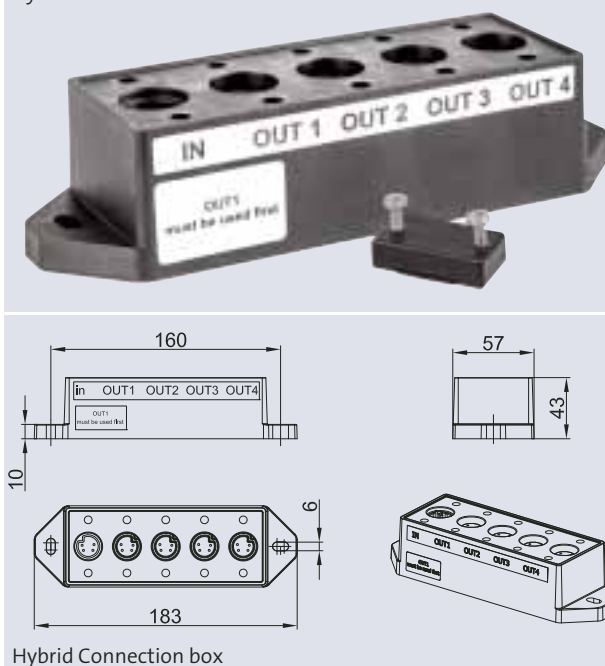

Hybrid Connection box

Hybrid connection box		
Dimensions (L x W x H)	[mm]	184 x 54 x 43
Maximum current	[A]	7.5
Weight	[kg]	0.4
Order no.		56404