



Application examples: 4 x LunaLed 9 s on a separate base construction, combined with the aid of the OASE multiple distributor

LUNALED

Radiant LED illumination for bubbling stones



- With 6 or 9 cold white LEDs
- Suitable for use underwater and above the water, e.g. for illumination of a bubbling stone
- High quality stainless steel cap, with which the water flow rate can be regulated
- Suitable for permanent underwater use, thanks to protection class IP68 (connection IP 44)
- Diameter 30 mm or 50 mm
- Half peak angle of the LED: 72°
- Incl. low volt plug transformer
- Easy installation via the innovative hose connector

PRODUCT DETAILS



Hose connectors

The innovative hose connector makes the installation easy. The power cable can be routed out through the opening and does not need to be threaded through the entire length of the hose.



Stainless steel cap

The high quality stainless steel cap enables fast adjustment of the water flow rate and protects the LED from damage.

LunaLed 6 s		LunaLed 9 s	
Height	l/min	Height	l/min
2 cm	3	2 cm	7
3.5 cm	5	3.5 cm	9
6 cm	6	6 cm	11
12 cm	8	12 cm	14

Amount of water required

The right pump is crucial for an appropriate fountain height; it is best to select the pump based on the water flow rate. Do not forget that hose length and diameter also play a role.

Extras

Top product characteristics

- High quality stainless steel cap
- Easy installation via hose connectors, ideal for bubbling stones
- Adjustable water feature height

Recommendation

Be creative - combine multiple LunaLeds using the OASE multiple distributor (page 280) and design your custom fountain.


TECHNICAL DATAS

		LunaLed 6s	LunaLed 9s
Dimensions (Ø x H)	mm	30 x 70	50 x 70
Rated voltage (primary, secondary)		230 V / 50 Hz, 12 V / DC	
Power consumption light fixture		< 1 W	
Power consumption set	W	2	
Protection class		IP 68, IP 44 (power unit)	
Power cable length	m	10.00	
Net weight	kg	0.60	0.80
Guarantee * P. 310	Years	2	
Connection inlet	mm	19	25
Connection inlet		¾"	1"
Illuminant type		LED	
Number of individual LEDs	EA	6	9
Light flux	lm	8	10
Light colour		Cold-white	
Colour temperature	K	6000	
Half peak angle		72 Degrees	
Item no. (GB-Version)		Not available in GB	
Item no.		50114	50115


*page 310



Dimension drawing: LunaLed 6 s

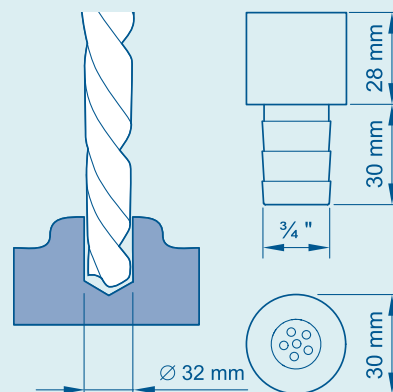

Dimension drawing: LunaLed 9 s

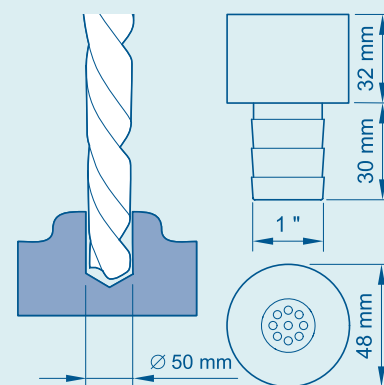

Recommended supplemental products

Water feature pumps Aquarius Universal page 34–39

Additional pond construction material, such as hoses, hose connectors, etc. from page 260