



	Fresh Water	Pool Water	Sea Water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug and Spray
Power splice 43													

POWER SPLICE 43


Underwater cable connector (1 to 1-4) for different cable diameters from 5.5 to 16 millimeters, wire diameters from 1.1 mm² to max. 10 mm².

Packing unit 2

NEW



Power splice 43

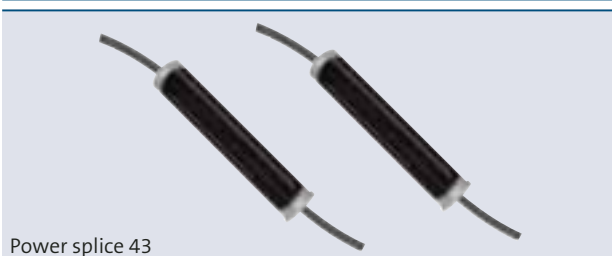

Power splice 43

Scope of Delivery

- 1 - Potting material 2k
- 2 - Sandpaper
- 3 - Crimp connector 1,1 mm² - 2,6 mm²
- 4 - Crimp connector 4 mm² - 6 mm²
- 5 - Luster terminal 0,5 mm² - 1,5 mm²
- 6 - Luster terminal 1,5 mm² - 4 mm²
- 7 - Luster terminal 10 mm²
- 8 - Pair of gloves
- 9 - Adhesive tape
- 10 - Grommet d 11,5 mm
- 11 - Grommet d 8,5 mm
- 12 - Grommet d 5 mm
- 13 - Grommet 4 x d 11mm for distributor
- 14 - Pipe with grommet + holder insert
- 15 - Cable tie

Tools needed on site

- Slotted screwdriver
- Side cutter
- Cutter knife
- Crimp tool
- Wire stripper

Power splice 43		
Dimensions (D x H)	[mm]	48 x 240
Power supply for	[V]	DMX-cable, hybrid cable, 24V DC, 12V AC, 230V, 400V
Protection class		IP68
Suitable for cable diameter	[mm]	5.5 - 16
Material		PET
Weight	[kg]	0.70
Packaging unit		2
Order no.		57649