



Aquarius Fountain Set Eco installed

# AQUARIUS FOUNTAIN SET ECO



*Powerful fountain pumps with energy-saving motors*

*Innovation: »Environmental Function Control«  
The pumps switch off automatically in the event of dry run and prevents damage to the device.*



PRO

- Powerful and energy-efficient fountain pump sets
- Telescopic pipe extension with integrated swivel head for individual alignment of the fountain
- Second, separately adjustable outlet
- Adapter with stainless steel fine filter sieve for uniform water patterns, even with a small amount of contamination.
- Including Vulkan and Lava nozzle
- With wide base for safe stance
- »Environmental Function Control« (EFC by OASE) protects against dry run and blocking

## PRODUCT DETAILS



### Second outlet

On the second separately adjustable outlet, a small watercourse or water spout can be connected. Suitable for 3/4" to 1 1/2" (19 - 38 mm) hoses.



### Water patterns

Three different high-quality fountain attachments are included in the scope of delivery: 2 x Vulkan and 1 x Lava.


## Extras

### Top product characteristics

- Energy-efficient fountain pump - saves money
- Individual alignment of the fountain is possible with swivel joint
- With additional second outlet for parallel operation of small watercourses or water spouts

### Recommendation

Regular use of AquaActiv PumpClean ensures an optimally cleaned pump and extends its service life.

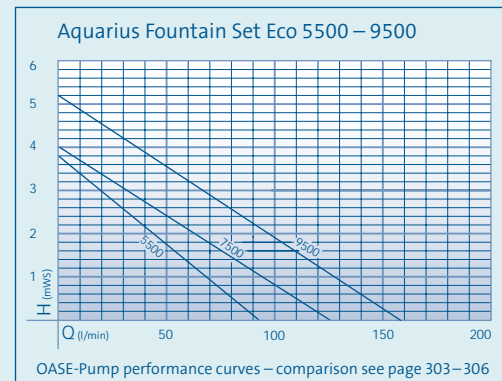

## TECHNICAL DATAS

		Aquarius Fountain Set Eco 5500	Aquarius Fountain Set Eco 7500	Aquarius Fountain Set Eco 9500
Dimensions (L x W x H)	mm	290 x 230 x 180		
Rated voltage		220 - 240 V / 50 Hz		
Power consumption	W	70	85	125
Power cable length	m	10.00		
Net weight	kg	5.00		5.90
Guarantee (+ request guarantee) * P.310	Years	3 + 2		
Max. flow rate	l/min	91	125	158
Max. flow rate	l/h	5500	7500	9500
Max. head height	m	3.80	4.00	5.20
Connection pressure-side	mm	38		
Connection pressure-side		1 ½"		
Connection suction-side	mm	38		
Connection suction-side		1 ½"		
Connection for hoses	mm	19 / 25 / 32 / 38		
Connection for hoses		¾", 1", 1 ¼", 1 ½"		
Filter intake surface	cm²	400		
Electronically adjustable		No		
Number of nozzles	EA	2		
Telescopic nozzle extension	cm	30 - 52		
Setup type		Underwater installation only		
Item no. (GB-Version)		41924	41926	41928
Item no.		41923	41925	41927