



Application example: Aquarius Universal Expert with Schaumsprudler 55 - 15 E


# AQUARIUS UNIVERSAL EXPERT

*Robust powerhouses for impressive fountains and imposing decorative water features*



- Undisturbed splashing water, thanks to extremely quiet operation
- Integrated thermo protection
- Can be setup underwater & dry
- Energy efficient thanks to low energy consumption
- Frost proof to -20°C
- High-quality workmanship with stainless steel
- With adapter set for connection of 1" and 1½" nozzles
- Ergonomic handle for easy transport and installation
- Highly stable with excellent performance.
- Electronic adjustment with optional accessory InScenio FM-Profimaster

## PRODUCT DETAILS




### Robust filter basket

Thanks to this robust stainless steel filter basket, coarse debris particles up to 4 mm in size are displaced with no problems.



### Adapter set

An adapter set for connecting all 1" (25 mm) and 1 1/2" (38 mm) OASE fountain attachments is included in the scope of delivery of the Aquarius Expert 21000 – 40000 fountain pumps.

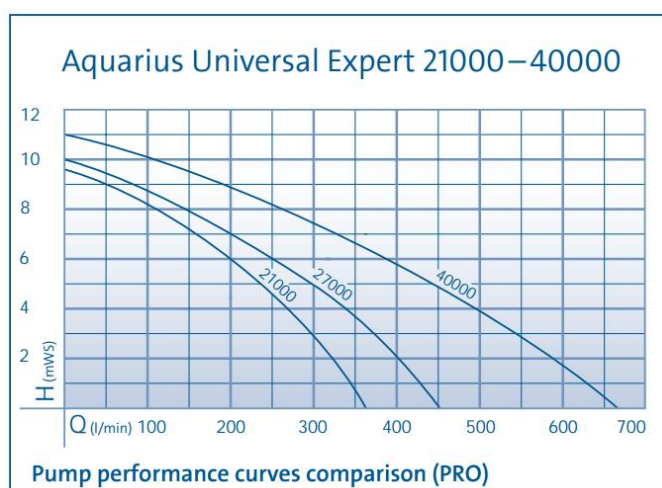

## TECHNICAL DATAS

		Aquarius Universal Expert 21000	Aquarius Universal Expert 27000	Aquarius Universal Expert 40000
Dimensions (L x W x H)	mm	420 x 220 x 260		460 x 235 x 295
Rated voltage		220 - 240 V / 50 Hz		
Power consumption	W	470	645	1000
Power cable length	m	10.00		
Net weight	kg	14.20		19.70
Guarantee (+ request guarantee) * P. 310	Years	3 + 2		
Max. flow rate	l/min	363	450	666
Max. flow rate	l/h	21800	27000	40000
Max. head height	m	9.60	10.00	11.00
Connection pressure-side	mm	50		
Connection pressure-side		2"		
Connection suction-side	mm	50		63
Connection suction-side		2"		2 1/2"
Connection for hoses	mm	38 / 50		
Connection for hoses		1 1/2", 2"		
Filter intake surface	cm²	1350		1650
Electronically adjustable		Yes		
Number of nozzles	EA	-		
Telescopic nozzle extension	cm	-		
Setup type		Can be setup underwater & dry		
Item no. (GB-Version)		-		
Item no.		56870	56871	56872

\*page 310



## Extras

### Top product characteristics

- Powerful pumps for large installations
- Frost-proof to -20° Celsius
- Electronic flow rate adjustment

### Recommendation

With the OASE fountain attachments, different water patterns can be created to suit your taste. The fountain attachments can be staged in combination with the matching optional OASE illumination. For an attractive bubbling stone water pattern, for pump selection, calculate 0.5 – 1 l / min water per cm of stone diameter. Extend the service life of your fountain and ensure lasting high performance with the special AquaActiv PumpClean cleaner.

## Accessories

### Vulcan 43 - 3 silver

43-jet fountain with 4 levels and a jet diameter of 3 mm.

Item no. 50766 page 55



### Schaumsprudler 55 - 15 E

Attractive Schaumsprudler 55-15E fountain attachment made of stainless steel.

Item no. 50987 page 56



### Cluster Eco 15 - 38

21 single jets generate an imposing continuous jet with a diameter of 38 mm

Item no. 45480 page 56



### InScenio FM-Profimaster

Wireless remote control garden power outlet for electronic adjustment.

Item no. 56886 page 244

