



	Fresh Water	Pool Water	Sea Water	220-240 V	400 V	110-120 V	50 Hz	60 Hz	12 V AC	24 V DC	DMX	DMX/RDM	Plug and Spray
Comet													

## COMET 3-5 T TO 15-20 T

These single-jet nozzles generate a clear, full jet that is stable in wind.

These nozzles are usually arranged in a group. All sizes have a ball joint with which the jet can be pivoted up to 15° from the vertical plane.



Comet 15-20 T


This feature makes it possible to generate interesting water patterns.

The Comet 10-12 T and Comet 10-14 T is ideal for the combination with ProfiPlane LED 320 / DMX / 02 and ProfiRing LED 320 / DMX / 02 (see page 128-131).

### Product characteristics at a glance

- Small to medium-sized clear-jet nozzles with flow director
- Fountain heights 0.5 m to 14.0 m
- Clear wind-stable full jet
- Up to 15° vertically pivoting ball joint
- Water-level independent
- Extensive design versatility: as a single fountain or in groups

Accessories (must be ordered separately)	Order no.
Sleeve 10 silver (see page 244)	51018
Sleeve 15 silver (see page 244)	51019
Reducing sleeve 15 x 10 (see page 245)	51032
Reducing sleeve 20 x 15 (see page 245)	51030

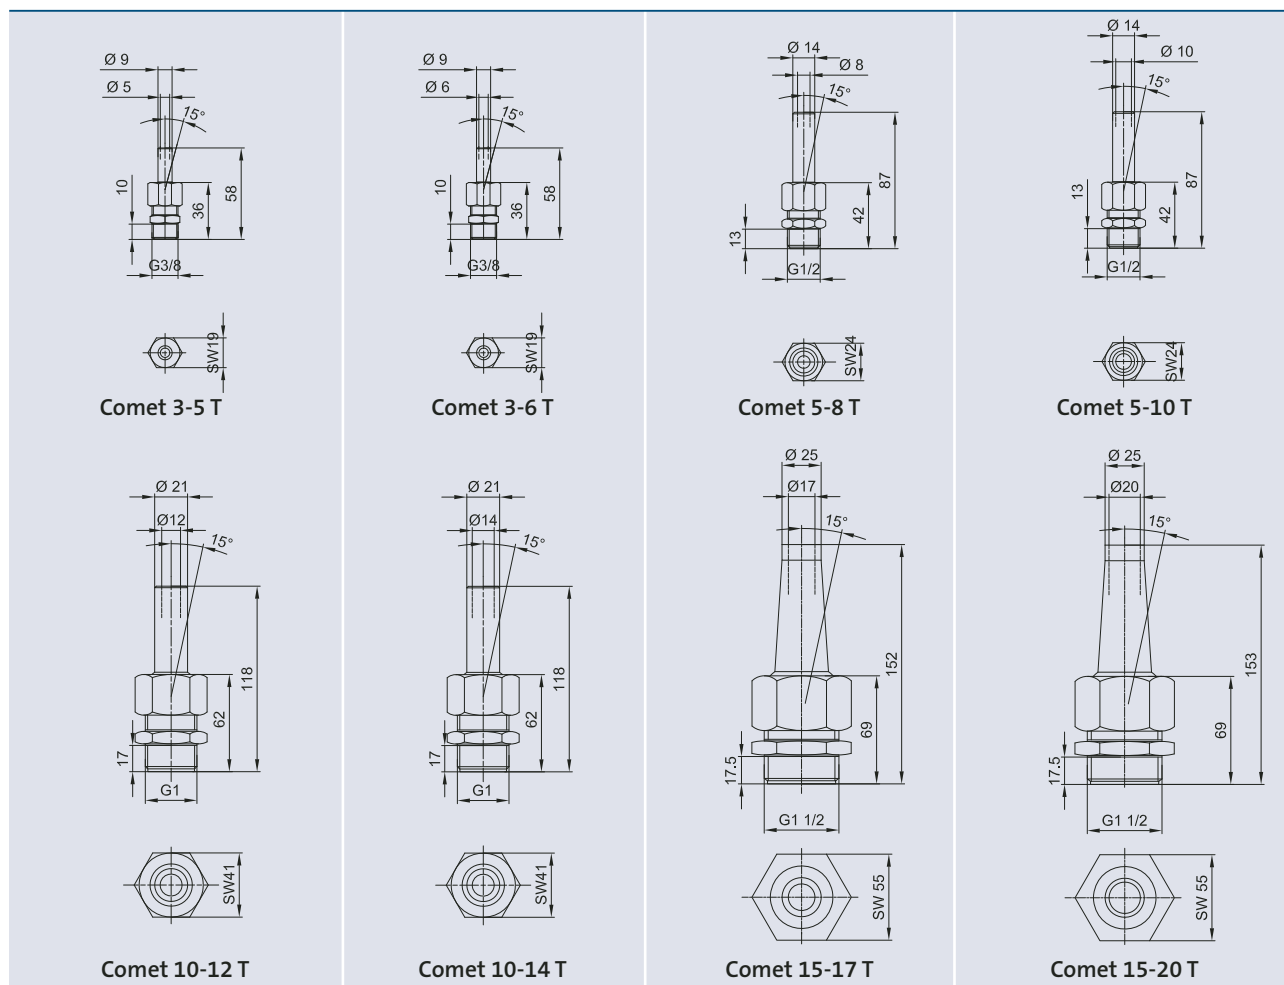

	Comet 3-5 T		Comet 3-6 T		Comet 5-8 T		Comet 5-10 T		Comet 10-12 T		Comet 10-14 T		Comet 15-17 T		Comet 15-20 T	
Dimensions (Ø x H mm)	19 x 58		21.9 x 58		27.6 x 87		27.6 x 87		47.3 x 118		47.3 x 118		63.3 x 152		63.3 x 152	
Fountain height	DWB	DDB	DWB	DDB	DWB	DDB	DWB	DDB	DWB	DDB	DWB	DDB	DWB	DDB	DWB	DDB
	l/min	bar	l/min	bar	l/min	bar	l/min	bar	l/min	bar	l/min	bar	l/min	bar	l/min	bar
0.50 [m]	3.8	0.07	4.8	0.06	9.5	0.07	15	0.08	21	0.06	30	0.06	42	0.06	59	0.06
0.75 [m]	5.3	0.09	6.2	0.09	11.5	0.10	19	0.11	25	0.08	37	0.09	52	0.09	74	0.08
1.00 [m]	6.3	0.13	7.2	0.12	12.6	0.13	21	0.14	31	0.11	44	0.12	62	0.11	88	0.13
1.25 [m]	7.2	0.15	8.7	0.15	14.9	0.16	25	0.18	35	0.14	50	0.15	69	0.14	99	0.16
1.50 [m]	8.0	0.18	10.0	0.18	17.0	0.18	28	0.20	39	0.17	55	0.18	76	0.17	110	0.17
1.75 [m]	8.7	0.22	11.1	0.21	18.8	0.21	31	0.25	43	0.21	60	0.21	82	0.19	119	0.21
2.00 [m]	9.3	0.25	12.1	0.25	20.5	0.24	33	0.28	46	0.23	65	0.24	89	0.22	128	0.22
2.50 [m]			14.0	0.32	23.4	0.32	37	0.36	53	0.29	73	0.30	100	0.28	144	0.28
3.00 [m]			15.6	0.40	26.1	0.39	41	0.44	58	0.35	81	0.37	110	0.34	158	0.34
3.50 [m]					28.5	0.47	45	0.52	63	0.42	87	0.43	119	0.40	171	0.39
4.00 [m]					30.7	0.54	49	0.60	68	0.48	94	0.50	127	0.46	184	0.45
5.00 [m]							55	0.76	76	0.61	105	0.62	143	0.58	206	0.57
6.00 [m]							60	0.92	84	0.74	116	0.75	157	0.70	227	0.69
7.00 [m]									91	0.87	125	0.88	170	0.82	245	0.81
8.00 [m]									98	1.00	134	1.01	182	0.94	263	0.92
9.00 [m]											143	1.14	193	1.06	279	1.04
10.00 [m]											151	1.28	204	1.18	294	1.16
11.00 [m]													214	1.30	309	1.28
12.00 [m]													222	1.40	323	1.40
13.00 [m]															337	1.52
14.00 [m]															350	1.64
Material	Brass															
Weight [kg]	0.06		0.06		0.13		0.13		0.45		0.45		0.86		0.86	
Order no. NPT	-		89012		89013		89014		89015		89016		89017		89018	
Order no.	50959		50960		50964		50965		50968		50969		50970		50971	